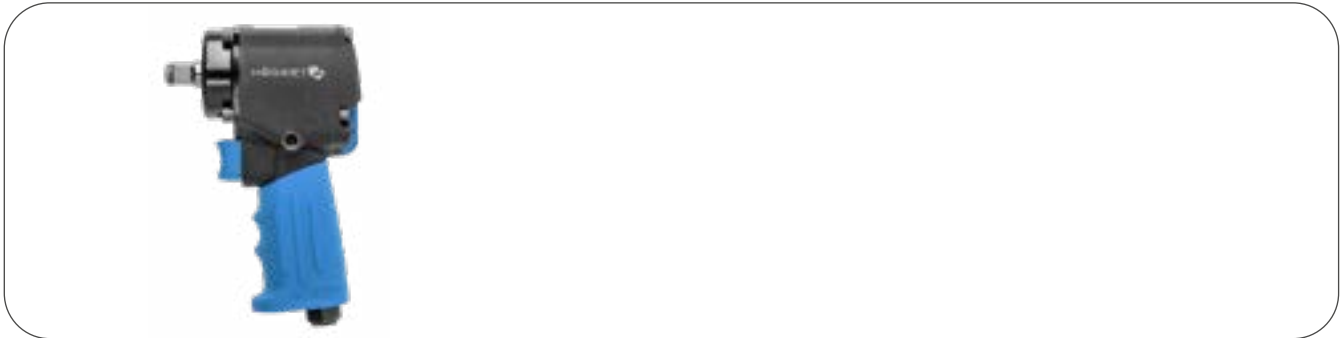


PRODUCT INFORMATION SHEET

Pneumatic wrench





Product description

Compact, ultra-short pneumatic impact wrench with a wide range of applications in car services, vulcanization and mechanical workshops. Thanks to its small design, it makes it possible to work in hard to reach and tight spaces. It is used for loosening and tightening screws and nuts.

Characteristics

- durable aluminium-composite body;
- light and well-balanced centre of gravity;
- 3-step speed regulation;
- left/right rotation switch;
- air outlet in the lower part of the handle;
- 1/2" JUMBO drive;
- max working torque up to 680 Nm;
- 1/4" air connection;
- working pressure 6.2 bar / 90 PSI;
- air consumption 113 l/min;
- rotation speed of 10,000 RPM;
- total length 108 mm;
- weight 1.45 kg.

Technical data

				
HT4R626	5902801370540	680 Nm	1	6



Höbert Technik GmbH, Pariser Platz 6a, 10117 Berlin, Deutschland
Producent/ Manufacturer/ Hersteller/ Произведено для:
PL GTV Poland S.A., ul. Przejazdowa 21
 05-800 Pruszków, Polska/ Poland/ Polen/ Польша
Importer/ Импортёр:
RU Россия, 109428, город Москва, Рязанский проспект, 8А,
 строение 7, этаж 2, кабинет 10; info@hoegert.ru.
HR GTV Croatia d.o.o.; Kovinska 4s, 10000 Zagreb, Hrvatska
Distributor:
ES GTV España Herrajes, E Iluminación, S.L.,
 Avenida Aragón 308, 46021 Valencia, Spain
CZ GTV Czech Distribution s.r.o., CTPark Ostrava,
 Na Rovince 879, 720 00 Ostrava Hrabová