


PRODUCT INFORMATION SHEET

Fuel injection pressure tester

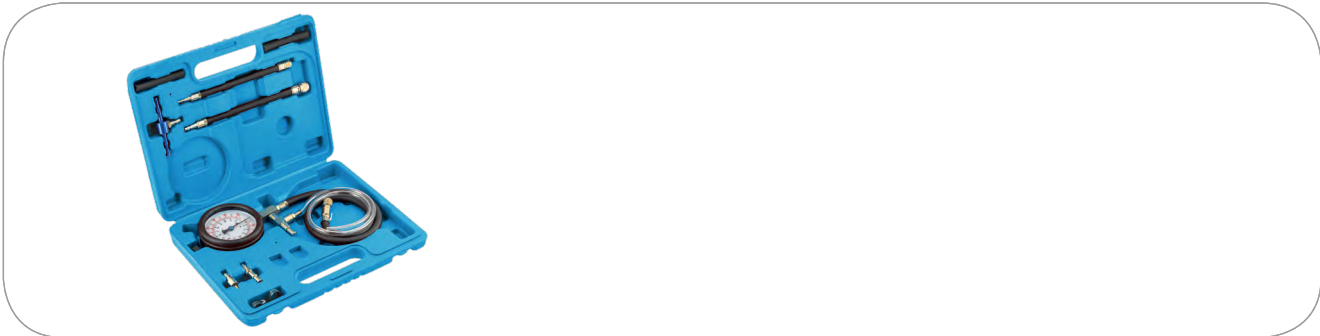

Product description

Pressure tester allows for precise measurement of fuel injection in the cylinders of gasoline and diesel engines. A legible, dual scale of manometer makes reading of the measurement result easy. The indicator is made of damage-resistant and lightweight materials. In addition, the indicator glass is enclosed by a rubber, shock-absorbing cover. The parts are equipped with quick couplings for easy and quick installation. Tester is mainly used in automotive services.

Characteristics

- analogue manometer with valve;
- maximum pressure 140 PSI/10 BAR;
- 10 elements in the set;
- packed in a plastic case for easy transport and storage of individual elements.

Set includes:

manometer with beam and drain hose
flexible hoses – 2 pcs.
rubber couplings – 2 pcs.
T-connector
replaceable tips – 2 pcs.
clamps – 2 pcs.

Technical data

HT8G416	5902801362101	1	10

7BAR
100 PSI

×10

**Högert Technik GmbH, Pariser Platz 6a,
10117 Berlin, Deutschland**
Producent/ Manufacturer/ Hersteller/ Произведено для:
PL GTV Poland sp. z o.o. sp.k., ul. Przejazdowa 21
 05-800 Pruszków, Polska/ Poland/ Polen/ Польша
Importer/ Импортёр:
RU ООО «ГТВ РУС» 140073, Московская область,
 город Люберцы, рабочий поселок Томилино,
 микрорайон Птицефабрика, литер 7А; info@hoegert.ru.
HR GTV Croatia d.o.o., Kovinska 4s, 10000 Zagreb, Hrvatska
Distributor:
ES GTV España Herrajes, E Iluminación, S.L.,
 Avenida Aragón 308, 46021 Valencia, Spain
CZ GTV Czech Distribution s.r.o., CTPark Ostrava,
 Na Rovince 879, 720 00 Ostrava Hrabová